

Technical data sheet

Screw-in spacer clip, heavy-duty version M10

Item number: 1388134



Can be screwed onto M10 thread. Size 27 FT is suitable for M25. Size 48.5 FT is suitable for M50. Size 60 FT is suitable for M63.



St

Steel

FT

Hot-dip galvanised

Master data

| | |
|---------------------|------------------------------|
| Item number | 1388134 |
| Type | 2900WM10 60 FT |
| Description 1 | Distance saddle |
| Description 2 | with threaded connection M10 |
| Manufacturer | OBO |
| Dimension | 2" |
| Material | Steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 15 |
| Unit of quantity | Piece |
| Weight | 11.346 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Screw-in spacer clip, heavy-duty version M10


Item number: 1388134



Dimensions

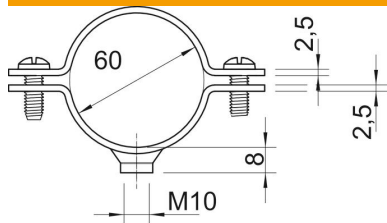

| | |
|-------------------|--------|
| Length | 105 mm |
| Width | 20 mm |
| Dimension A | 105 mm |
| Dimension B | 89 mm |
| Dimension L | 105 mm |
| Dimension t | 2.5 mm |
| Dimension t1 (mm) | 2.5 |
| Dimension x | 4 mm |



Technical data

| | |
|----------------------------------|------------|
| Version for | Closed |
| Fastening type | Screw hole |
| For diameter | 60 |
| for pipe diameter | M63 |
| Suitable in fire protection area | no |
| Thread | M10 |
| Size | 2" |
| Halogen-free | no |
| Plastic-covered | no |
| Hole size | M10 mm |
| Bolt | M6 x 20 |
| Clamping range D, max. | 60 mm |
| Clamping range D, min. | 56 mm |
| UV-resistant | yes |