

# Technical data sheet

## Sprint screw, with Phillips slot

Item number: 3192172



Hardened steel, electrogalvanised and Hostaflon-coated. Countersunk head with Phillips head (Pozidriv size 2 except Ø 6 mm Pozidriv size 3).

The use of Sprint screws leads to considerably reduced screw-in times compared with standard screws. This noticeable benefit is achieved by the point with the first thread, which leads onto the double thread beyond.

Areas of use: wood, chipboard, Rigips panels, plastic anchors.



**St** Steel

**G** Electrogalvanized

### Master data

|                     |                               |
|---------------------|-------------------------------|
| Item number         | 3192172                       |
| Type                | 4759 3.5x50                   |
| Description 1       | Sprint screw                  |
| Description 2       | countersunk head, cross drive |
| Manufacturer        | OBO                           |
| Dimension           | 3,5x50mm                      |
| Material            | Steel                         |
| Surface             | Electrogalvanized             |
| Surface standard    | EN ISO 19598 / EN ISO 4042    |
| Smallest sales unit | 200                           |
| Unit of quantity    | Piece                         |
| Weight              | 0.205 kg                      |
| Weight unit         | kg/100 pc.                    |


# Technical data sheet

## Sprint screw, with Philips slot


Item number: 3192172



### Dimensions

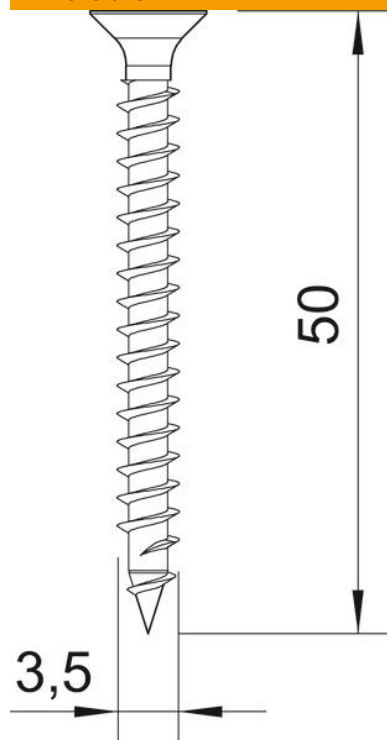

|             |        |
|-------------|--------|
| Length      | 50 mm  |
| Dimension D | 3.5 mm |
| Dimension L | 50 mm  |



### Technical data

|               |                  |
|---------------|------------------|
| Hardened      | yes              |
| Head diameter | 6.5 mm           |
| Head shape    | Countersunk head |
| Screw system  | Pozidrive PZ     |