

# Technical data sheet

## Cable tie, black, UV and weather-resistant

Item number: 2331818



Cable ties are used for quick, uncomplicated fixing or bundling of cables and pipes to cable support systems or other mounting structures.




PA Polyamide

### Master data

Item number	2331818
Type	565 2.5x150 SWUV
Description 1	Cable ties
Description 2	UV-resistant
Manufacturer	OBO
Dimension	2.5x150mm
Colour	Black
Material	Polyamide
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.047 kg
Weight unit	kg/100 pc.

### Dimensions

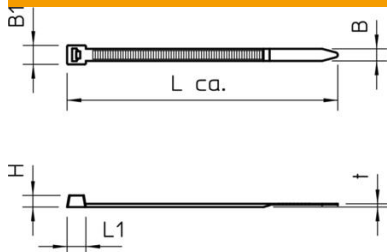

Length	150 mm
Width	2.5 mm
Height	1.3 mm
Dimension B	2.5 mm
Dimension L	150 mm
Dimension t	1.3 mm

### Technical data

Version for	Externally toothed
Strip closure	Plastic tongue/tab
Fastening type	Without
Labelling area	Without

# Technical data sheet

Cable tie, black, UV and weather-resistant

Item number: 2331818



## Technical data

Halogen-free	yes
Releasable lock	no
Max. Bundle diameter	39 mm
MIL approval	no
Mounting temperature, max.	90 °C
Mounting temperature_min.	-30 °C
Reflective	no
Permitted temperature range, max.	90 °C
Permitted temperature range, min.	-30 °C
Transparent	no
UL approval	yes
UV-resistant	yes
VG approval	no
Tensile strength	80 N