# **Technical data sheet** Junction box, B 11 M, with thread

### Item number: 2002329





Protection rating IP54, nominal voltage 660 V, nominal cross-section  $10 \div mm^2$ , two fastening holes for screws up to 6 mm Ø on the outside of the box, four cover screws, 10 break-out entries with thread M20 x 1.5, primarily for cable glands with short connecting thread.

Clear internal dimensions: 125x100x44 mm. B 11 /LM: with five-pole terminal strip KL 100 made of melamine with clamp ter-minals for max. three 10 mm<sup>2</sup> cables per terminal



Duroplast, Aminoplast


#### Master data

2002329
B 11 M 5
Junction box
with terminal strip
OBO
136x111x57
Light grey; RAL 7035
Duroplast, Aminoplast
1
Piece
39.7 kg
kg/100 pc.

# **Technical data sheet** Junction box, B 11 M, with thread

### Item number: 2002329



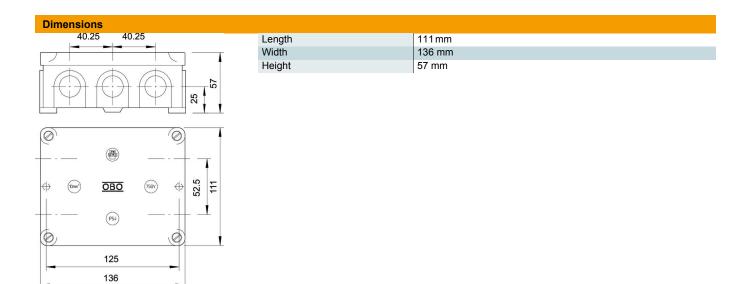

#### **Technical data**

Expandable	no
No. of entries	10
Number of terminals	5
Type of insertion	Gland
Type of entry	Cable
Type of housing penetration	Thread and pre-marking
Measured insulation voltage Vi	660 V
Cover	Not transparent
Cover fastening	Screwed
Entry from rear	no
Entries	10 break-out entries with thread M20 x 1.5
Explosion-tested version	no
Flame-resistant	Acc. to VDE 0471/DIN 695 Part 2-1, test temperature 750°C
Shape	Rectangular
Maintain electrical functions	Without
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
for pipe diameter	20 mm
Halogen-free	yes
Clear internal dimensions	125x100x44 mm
With screening	no
with lid	yes
Nominal cross-section, min.	10 mm <sup>2</sup>
Nominal voltage	660 V
Sealable	yes
Impact-resistant	no
Protection rating	IP54
Weatherproof	no