

Technical data sheet

Flat angle, for device installation trunking Rapid 80 type
GK-70130

Item number: 6274521



Flat angle for changing the direction of the GK device installation trunking.



PVC Polyvinylchloride

Master data

| | |
|---------------------|-------------------|
| Item number | 6274521 |
| Type | GK-F70130CW |
| Description 1 | Flat angle |
| Manufacturer | OBO |
| Dimension | 70x130mm |
| Colour | Cream; RAL 9001 |
| Material | Polyvinylchloride |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 83 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Flat angle, for device installation trunking Rapid 80 type
GK-70130

Item number: 6274521



Dimensions

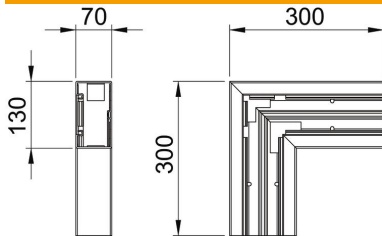

| | |
|--------|--------|
| Length | 300 mm |
| Width | 130 mm |
| Height | 70 mm |

Technical data

| | |
|-----------------------------------|--------------------------|
| Number of covers | 1 |
| Version for | Base |
| for duct width | 130 mm |
| for trunking height | 70 mm |
| Halogen-free | no |
| Cable retaining clip | no |
| Duct connector | no |
| Cover mounting type | Internal |
| Mounting perforation in base | yes |
| Change of direction | Vertical, rising/falling |
| Protection rating | IP30 |
| Protective film | yes |
| Protection rating IK code | IK08 |
| Symmetrical | yes |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -15 °C |
| Angle range, max. | 90 mm |
| Angle range, min. | 90 mm |