

Technical data sheet

Trunking connector and joint cover

Item number: 6113024



Joint cover for the bases of the Rapid 45-2 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 100 mm and 165 mm.



PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Master data

| | |
|---------------------|--|
| Item number | 6113024 |
| Type | GK-KS45-1AL |
| Description 1 | Joint cover |
| Description 2 | for Rapid 45-2 100 and 165 |
| Manufacturer | OBO |
| Dimension | 168x55x15 |
| Colour | Aluminium |
| Material | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 0.58 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Trunking connector and joint cover

Item number: 6113024



Dimensions

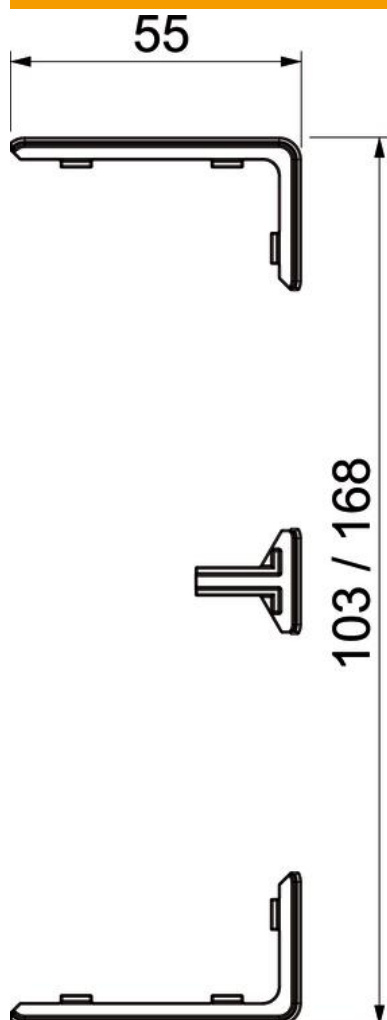

| | |
|--------|-------|
| Length | 15 mm |
| Width | 55 mm |
| Height | 27 mm |

Technical data sheet

Trunking connector and joint cover

Item number: 6113024



Technical data

| | |
|-----------------------------------|-------------------------|
| Version for | Trunking cut cover |
| Fastening type | Slide (before mounting) |
| Shape | Symmetrical |
| for duct width | 100.17 mm |
| for trunking height | 53 mm |
| Halogen-free | yes |
| Cover width | 45 mm |
| Protection rating | IP40 |
| Protection rating IK code | IK08 |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -15 °C |