

# Technical data sheet

## IS 8 support

Item number: 6361277



I support with welded head plate. For fastening to horizontal concrete ceilings and steel girders.  
Single and double-sided brackets of type AS 15, AS 30 and AS 55 can be fastened to the IS 8 K suspended support. The height of the brackets is infinitely adjustable.



**St** Steel

**FT** Hot-dip galvanised

### Master data

Item number	6361277
Type	IS 8 K 130 FT
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	80x42x1300
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Piece
Weight	843.8 kg
Weight unit	kg/100 pc.


# Technical data sheet

## IS 8 support

Item number: 6361277




### Dimensions

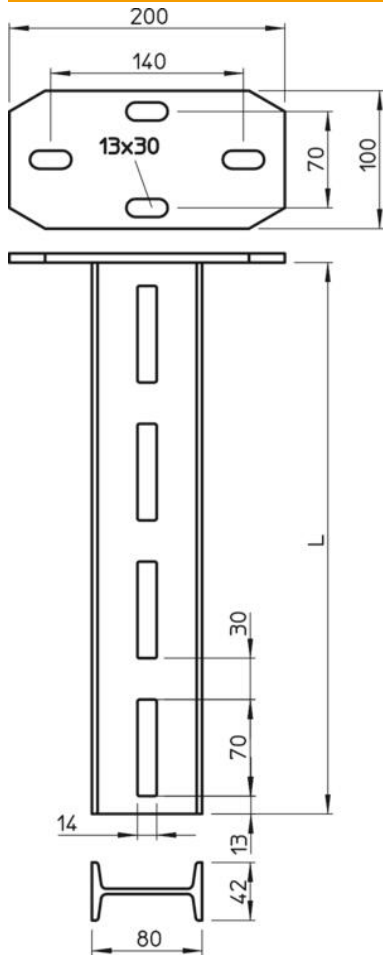

Length	1,300 mm
Width	80 mm
Height	42 mm

### Loads



### Chara

Max. tota  
= 10 cm  
of ETA(a

### Technical data

Version for	I profile
Bracket length 200	9.6 kN
Bracket length 400	7 kN
Bracket length 600	5 kN
Maintain electrical functions	no
Hole width	14 mm
Material thickness	4 mm
Maximum tensile load	12 kN
With tothing	no
Slot width	70 mm