Technical data sheet

IS 8 support

Item number: 6361331





I support with welded head plate. For fastening to horizontal concrete ceilings and steel girders.

Single and double-sided brackets of type AS 15, AS 30 and AS 55 can be fastened to the IS 8 K suspended support. The height of the brackets is infinitely ad-



Steel

Hot-dip galvanised


Master data

6361331
IS 8 K 160 FT
Support
with welded head plate
OBO
80x42x1600
Steel
Hot-dip galvanised
DIN EN ISO 1461
1
Piece
1017.8 kg
kg/100 pc.

Technical data sheet IS 8 support





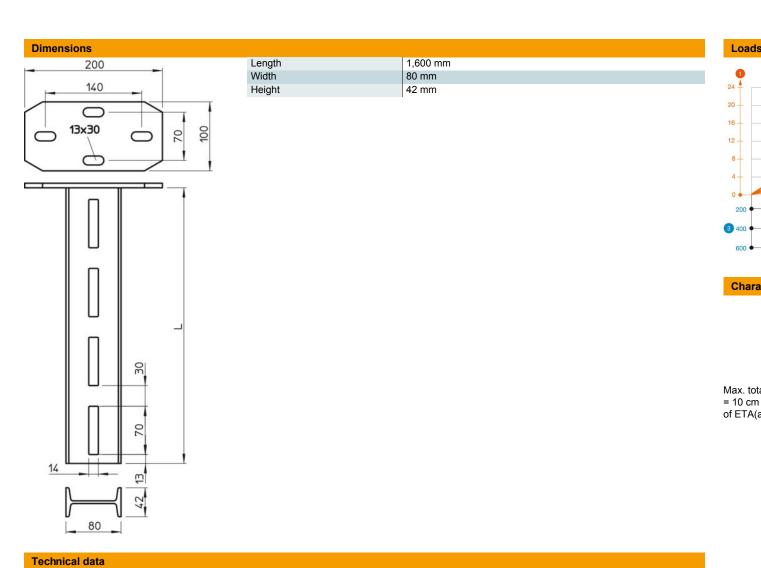

Version for	I profile
Bracket length 200	9.6 kN
Bracket length 400	7 kN
Bracket length 600	5 kN
Maintain electrical functions	no
Hole width	14 mm
Material thickness	4 mm
Maximum tensile load	12 kN
With toothing	no
Slot width	70 mm