


Technical data sheet

Magic straight connector set DD

Item number: 6068948



Cable tray connector with quick fastening for the screwless connection of perforated cable trays with a side height of 60 mm. The optimised design means that the connector can be used to create radii and as a length compensation piece for large temperature deviations.

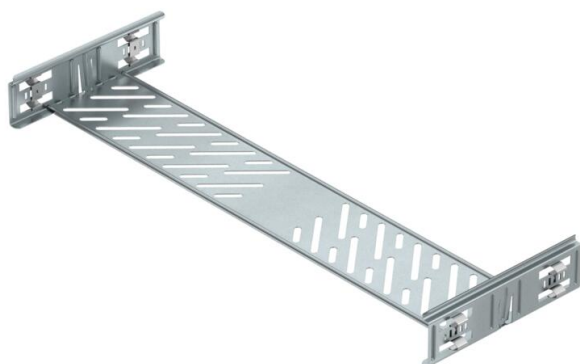

St Steel

DD Strip galvanised zinc/aluminium, Double Dip

Master data

| | |
|---------------------|---|
| Item number | 6068948 |
| Type | KTSMV 660 DD |
| Description 1 | Straight connector set |
| Description 2 | for cable tray Magic |
| Manufacturer | OBO |
| Dimension | 60x600x200 |
| Material | Steel |
| Surface | Strip galvanised zinc/aluminium, Double Dip |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 64.2 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Magic straight connector set DD

Item number: 6068948



Dimensions

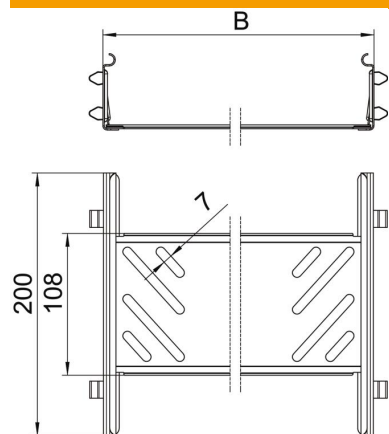

| | |
|-----------------|--------|
| Dimension | 60x600 |
| Length | 200 mm |
| Width | 600 mm |
| Height | 60 mm |
| Height | 2 in |
| Plate thickness | 1 mm |
| Dimension B | 600 mm |

Technical data

| | |
|---------------------------------------|---------------------|
| Version for | Straight connector |
| Maintain electrical functions | no |
| Suitable for mesh cable tray | no |
| Suitable for cable ladder | no |
| Suitable for cable tray | yes |
| Suitable for cable tray system height | 60 mm |
| Adjustable connector, horizontal | no |
| Articulated connector, vertical | no |
| Rustproof steel, pickled | no |
| Connection type | Screwless connector |