Technical data sheet

MS5030 mounting rail, slot 22 mm, FT, unperforated

Item number: 1121529



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



St	Steel

FT

Hot-dip galvanised

Master data


Item number	1121529
Туре	MS5030UP6000FT
Description 1	Profile rail
Description 2	unperforated, slot 22mm
Manufacturer	OBO
Dimension	6000x50x30
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	6
Unit of quantity	Metre
Weight	307 kg
Weight unit	kg/100 m

Technical data sheet

MS5030 mounting rail, slot 22 mm, FT, unperforated

Item number: 1121529



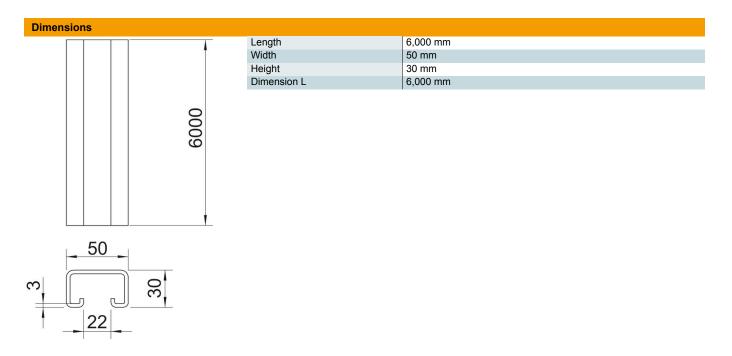

Technical data

Breakable	no
Type of perforation	Without
Version for	Single profile
Maintain electrical functions	no
Material thickness	3 mm
With perforation	no
With toothing	no
Profile shape	C profile
Slot width	22 mm
Static value A	1.74 cm ²
Static value ly	1.19 cm
Static value Iz	4.46 cm
Static value Wy	1.05 cm ²
Static value Wz	2.23 cm ²