

# Technical data sheet

## Vertical ladder, SLS80

Item number: 6010121



Industrial vertical ladder system for the maintenance of electrical function to DIN 4102 Part 12. Approved clips, type BS-U1-M-... FT. Supplied unmounted. Rung distance 300 mm. Rungs, type CK 40/..., and bolts, type FRS 10 x 25 FT, are supplied unmounted with rail profiles.

- St** Steel
- FT** Hot-dip galvanised

### Master data

Item number	6010121
Type	SLS80C40F 60 FT
Description 1	Vertical ladder
Description 2	rung distance 300 mm
Manufacturer	OBO
Dimension	600x3000mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	3
Unit of quantity	Metre
Weight	1597 kg
Weight unit	kg/100 m


# Technical data sheet

## Vertical ladder, SLS80

Item number: 6010121



### Dimensions

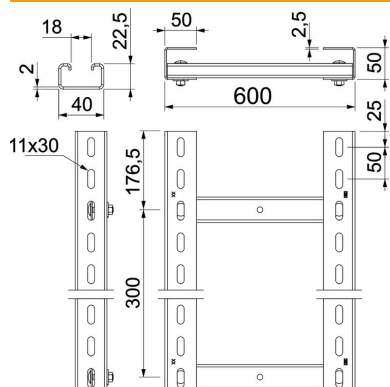

Length	3,000 mm
Width	600 mm
Height	80 mm
Dimension B	600 mm
Rung slot dimension	2.00

### Technical data

Side wall version	Profile (open)
Version of the rungs	Profile unperforated
Maintain electrical functions	yes
Rustproof steel, pickled	no
Side perforation	yes
Rung distance	300 mm