

# Technical data sheet

## Beam clamp SSP 20-40, VA M6

Item number: 1486242



This type of beam clamp is pushed onto the support and fixed to the girder or flat iron using a pressure trough and bolt (M8). The hexagonal bolt has a WAF of 10 mm. In the clip element, two additional M6 threads are also incorporated, to fix threaded rods, for example.

CE

A2 Stainless steel

2B Bright, treated

### Master data

Item number	1486242
Type	SSP 20-40 M6 A2
Description 1	Beam clamp
Description 2	heavyweight design
Manufacturer	OBO
Dimension	20-40mm
Material	Stainless steel
Surface	Bright, treated
Surface standard	
Smallest sales unit	25
Unit of quantity	Piece
Weight	27.7 kg
Weight unit	kg/100 pc.


# Technical data sheet

## Beam clamp SSP 20-40, VA M6

Item number: 1486242



### Dimensions

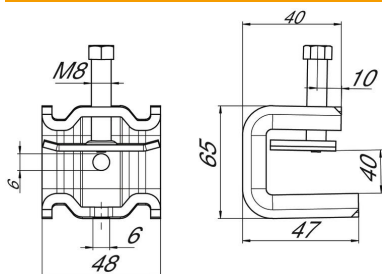

Dimension B	48 mm
Dimension H	65 mm
Dimension L	47 mm

### Technical data

Connection type/component	Thread
Fastening type	Clamp
Breaking load F1	1.4 kN
Breaking load F2	1.3 kN
Flange thickness F max.	40 mm
Flange thickness F min.	20 mm
Suitable for metric threaded rod	6
Thread	M8
Thread metric	8
Hinge, adjustable	no
Hinged	no