## **Technical data sheet**

Junction box T 100, with Wieland socket 2s5p

### Item number: 2007852





Junction box with Wieland sockets, 6s3p 3x2, for the connection of cables indoors and in protected outdoor areas. Rectangular design with knock-out entries to the sides and knock-out entries in the bottom. Suitable for wall and ceiling mounting and on mounting panels. With the option of fastening inside and to mount via the corner domes. Cover with quick lock, sealable. Made from halogen-free and UV-resistant materials.

Junction box according to DIN EN 60670. Flame-resistant to DIN EN 60695/2/11, test temperature 650  $^\circ$ C. Clear internal dimensions: 136x102x57 mm



#### Master data


Item number2007852TypeT 100 WB 2s5Description 1Junction boxDescription 2with Wieland sockets 2s5p	
Description 1 Junction box	
Description 2 with Wieland sockets 2s5p	
Manufacturer OBO	
Dimension 150x116x67	
Colour Light grey; RAL 7035	
Material Polypropylene	
Smallest sales unit 1	
Unit of quantity Piece	
Weight 25 kg	
Weight unit kg/100 pc.	


# **Technical data sheet**

Junction box T 100, with Wieland socket 2s5p

### Item number: 2007852



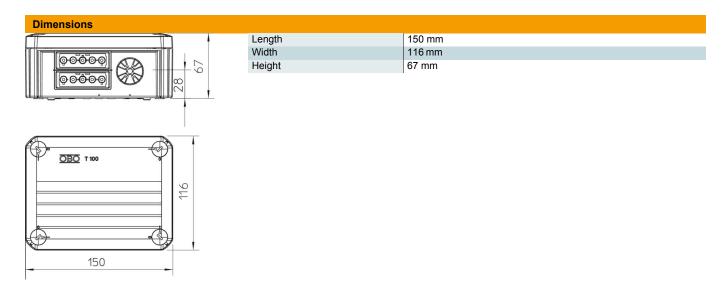



Expandable	yes
No. of entries	4
Type of insertion	Strain relief entries for direct penetrations for cable diameters of 7–21 mm
Type of housing penetration	Pre-marking
Measured insulation voltage Vi	500 V
Equipment	Miscellaneous
Cover	Not transparent
Cover fastening	Screwed
Entry from rear	yes
Entries	4
Explosion-tested version	no
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C
Shape	Rectangular
Maintain electrical functions	Without
For Ex zone	Without
For Ex zone gas	Without
For Ex zone dust	Without
Halogen-free	yes
Clear internal dimensions	136x102x57 mm
With screening	no
with lid	yes
Mounting type	Wall/ceiling mounting
Nominal cross-section, min.	2.5 mm <sup>2</sup>
Nominal voltage	500 V
Sealable	yes
Protection rating	IP20
Permitted temperature range, max.	0°C
Permitted temperature range, min.	-5 °C
Weatherproof	no