

Technical data sheet

US 3 support A2

Item number: 6342417



Suspended support (U profile) of dimensions 50 x 30 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.



A2 Stainless steel

2B Bright, treated

Master data

Item number	6342417
Type	US 3 K 100 A2
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	50x30x1000
Material	Stainless steel
Surface	Bright, treated
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	150 kg
Weight unit	kg/100 pc.


Technical data sheet

US 3 support A2

Item number: 6342417




Dimensions

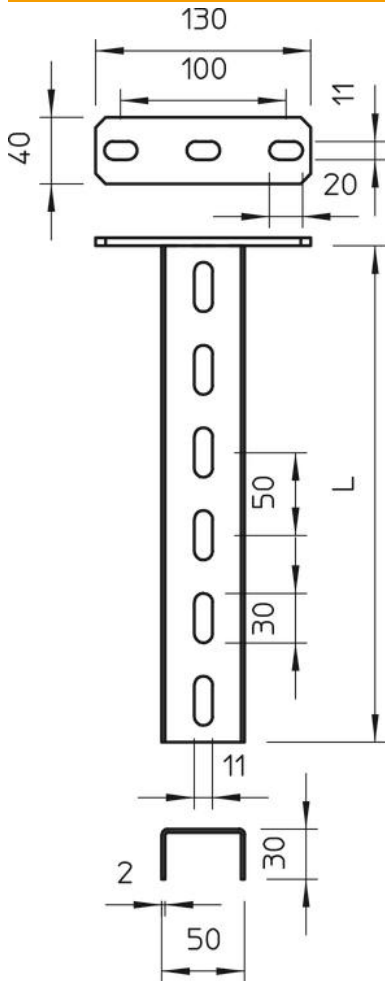

Length	1,000 mm
Width	50 mm
Height	30 mm

Loads



Chara



Max. total
= 10 cm
of ETA(a)

Technical data

Version for	U profile
Bracket length 200	2.1 kN
Bracket length 400	1.1 kN
Maintain electrical functions	no
Material thickness	2 mm
Maximum tensile load	5 kN