

Technical data sheet

US 3 support A2

Item number: 6342411



Suspended support (U profile) of dimensions 50 x 30 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.



A2 Stainless steel

2B Bright, treated

Master data

| | |
|---------------------|------------------------|
| Item number | 6342411 |
| Type | US 3 K 70 A2 |
| Description 1 | Support |
| Description 2 | with welded head plate |
| Manufacturer | OBO |
| Dimension | 50x30x700 |
| Material | Stainless steel |
| Surface | Bright, treated |
| Surface standard | |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 110 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

US 3 support A2

Item number: 6342411



Dimensions

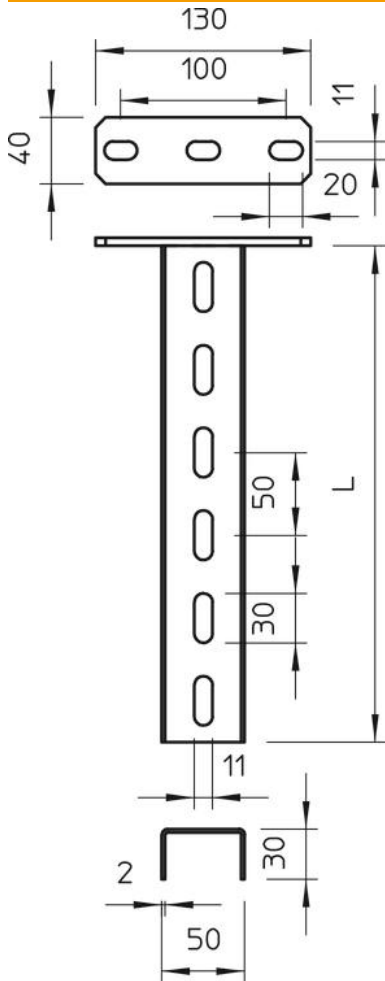

| | |
|--------|--------|
| Length | 700 mm |
| Width | 50 mm |
| Height | 30 mm |

Loads



Chara



Max. total
= 10 cm
of ETA(a)

Technical data

| | |
|-------------------------------|-----------|
| Version for | U profile |
| Bracket length 200 | 2.1 kN |
| Bracket length 400 | 1.1 kN |
| Maintain electrical functions | no |
| Material thickness | 2 mm |
| Maximum tensile load | 5 kN |