

Technical data sheet

US 3 support A2

Item number: 6342413



Suspended support (U profile) of dimensions 50 x 30 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 25.



A2 Stainless steel

2B Bright, treated

Master data

Item number	6342413
Type	US 3 K 80 A2
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	50x30x800
Material	Stainless steel
Surface	Bright, treated
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	123 kg
Weight unit	kg/100 pc.


Technical data sheet

US 3 support A2

Item number: 6342413



Dimensions

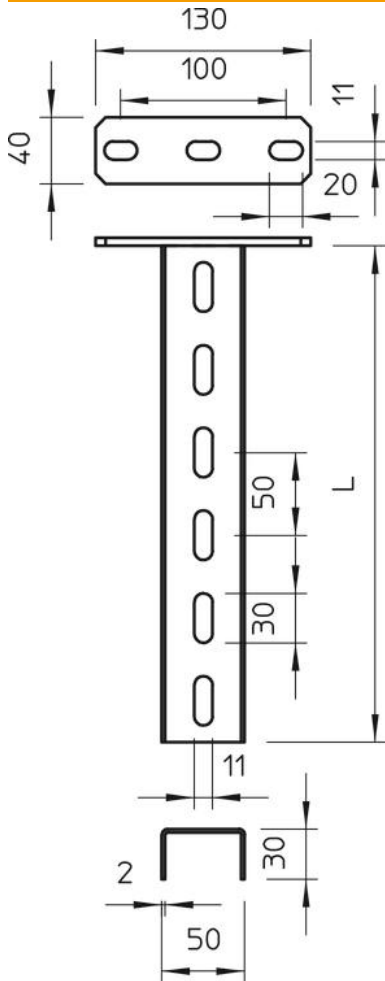

Length	800 mm
Width	50 mm
Height	30 mm

Loads



Chara



Max. total
= 10 cm
of ETA(a)

Technical data

Version for	U profile
Bracket length 200	2.1 kN
Bracket length 400	1.1 kN
Maintain electrical functions	no
Material thickness	2 mm
Maximum tensile load	5 kN