## Technical data sheet US 5 support A2

**Item number: 6341394** 





Suspended support (U profile) with welded head plate. For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 45.



A2

Stainless steel

2B

Bright, treated


## Master data

Item number	6341394
Туре	US 5 K 110 A2
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	50x50x1100
Material	Stainless steel
Surface	Bright, treated
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	330 kg
Weight unit	kg/100 pc.

## Technical data sheet US 5 support A2





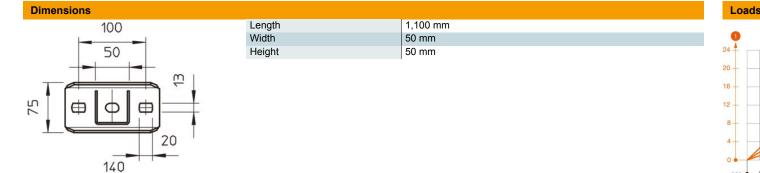

Max. tota = 10 cm of ETA(a

Chara

	U		
	0	30	
11	0	_ 1	
1	0		7
10	0		
20	0		ļ
25	50	_	

## Technical data

Version for	U profile
Bracket length 200	4 kN
Bracket length 400	2.2 kN
Bracket length 600	1.7 kN
Maintain electrical functions	no
Material thickness	2.5 mm
Maximum tensile load	10 kN