

# Technical data sheet

## US 7 support A2

Item number: 6338747



Suspended support (U profile) with welded head plate.  
For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 61.



**A2** Stainless steel

**2B** Bright, treated

### Master data

|                     |                        |
|---------------------|------------------------|
| Item number         | 6338747                |
| Type                | US 7 K 150 A2          |
| Description 1       | Support                |
| Description 2       | with welded head plate |
| Manufacturer        | OBO                    |
| Dimension           | 70x50x1500             |
| Material            | Stainless steel        |
| Surface             | Bright, treated        |
| Surface standard    |                        |
| Smallest sales unit | 1                      |
| Unit of quantity    | Piece                  |
| Weight              | 690 kg                 |
| Weight unit         | kg/100 pc.             |


# Technical data sheet

## US 7 support A2

Item number: 6338747



### Dimensions

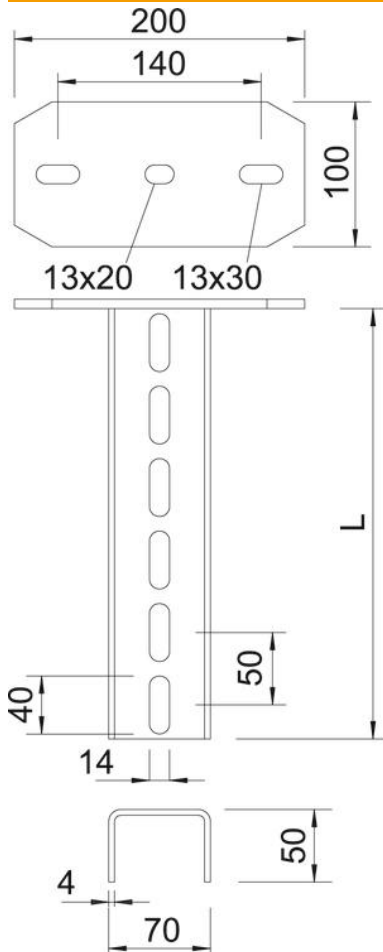

|        |          |
|--------|----------|
| Length | 1,500 mm |
| Width  | 70 mm    |
| Height | 50 mm    |

### Loads



### Chara

Max. total  
= 10 cm  
of ETA(a)

### Technical data

|                               |                    |
|-------------------------------|--------------------|
| Type of perforation           | 3 sides perforated |
| Version for                   | U profile          |
| Bracket length 200            | 8.3 kN             |
| Bracket length 400            | 5 kN               |
| Bracket length 600            | 3.5 kN             |
| Maintain electrical functions | no                 |
| Material thickness            | 4 mm               |
| Maximum tensile load          | 11 kN              |