

# Technical data sheet

## US 7 support A2

Item number: 6338801



Suspended support (U profile) with welded head plate.  
For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 61.



**A2** Stainless steel

**2B** Bright, treated

### Master data

Item number	6338801
Type	US 7 K 200 A2
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	70x50x2000
Material	Stainless steel
Surface	Bright, treated
Surface standard	
Smallest sales unit	1
Unit of quantity	Piece
Weight	889 kg
Weight unit	kg/100 pc.


# Technical data sheet

## US 7 support A2

Item number: 6338801




### Dimensions

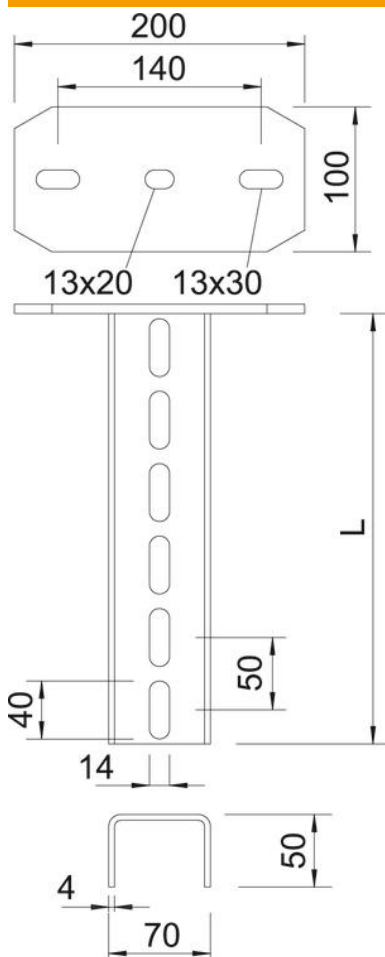

Length	2,000 mm
Width	70 mm
Height	50 mm

### Loads



### Chara

Max. total  
= 10 cm  
of ETA(a)

### Technical data

Type of perforation	3 sides perforated
Version for	U profile
Bracket length 200	7.5 kN
Bracket length 400	4.2 kN
Bracket length 600	2.9 kN
Maintain electrical functions	no
Material thickness	4 mm
Maximum tensile load	11 kN