

# Technical data sheet

## US 7 support FT

Item number: 6339034



Suspended support (U profile) of dimensions 70 x 50 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 61.



**St** Steel

**FT** Hot-dip galvanised

### Master data

|                     |                        |
|---------------------|------------------------|
| Item number         | 6339034                |
| Type                | US 7 K 30 FT           |
| Description 1       | Support                |
| Description 2       | with welded head plate |
| Manufacturer        | OBO                    |
| Dimension           | 70x50x300              |
| Material            | Steel                  |
| Surface             | Hot-dip galvanised     |
| Surface standard    | DIN EN ISO 1461        |
| Smallest sales unit | 1                      |
| Unit of quantity    | Piece                  |
| Weight              | 218 kg                 |
| Weight unit         | kg/100 pc.             |


# Technical data sheet

## US 7 support FT

Item number: 6339034



### Dimensions

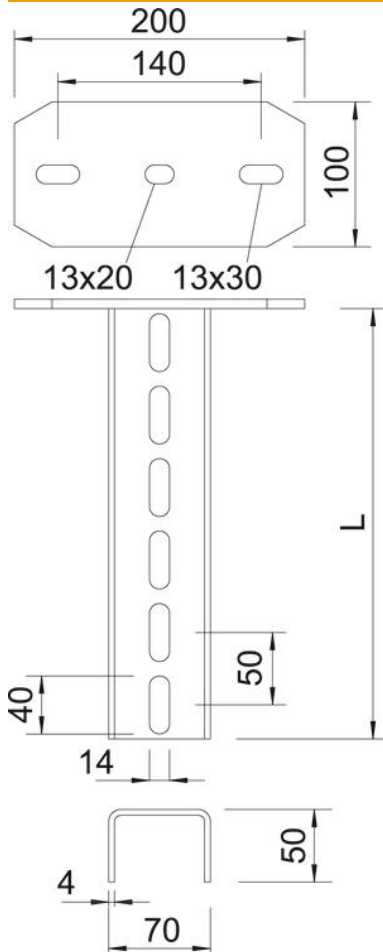

|             |        |
|-------------|--------|
| Length      | 300 mm |
| Width       | 70 mm  |
| Height      | 50 mm  |
| Dimension L | 300 mm |

### Loads



### Chara

Max. total  
= 10 cm  
of ETA(a)

### Technical data

|                               |           |
|-------------------------------|-----------|
| Version for                   | U profile |
| Bracket length 200            | 8.3 kN    |
| Bracket length 400            | 5 kN      |
| Bracket length 600            | 3.5 kN    |
| Maintain electrical functions | yes       |
| Material thickness            | 4 mm      |
| Maximum tensile load          | 11 kN     |