


# Technical data sheet

## External corner cover, trunking type WDKH 30045

Item number: 6175626



External corner cover for changing the direction of the halogen-free WDKH trunking.

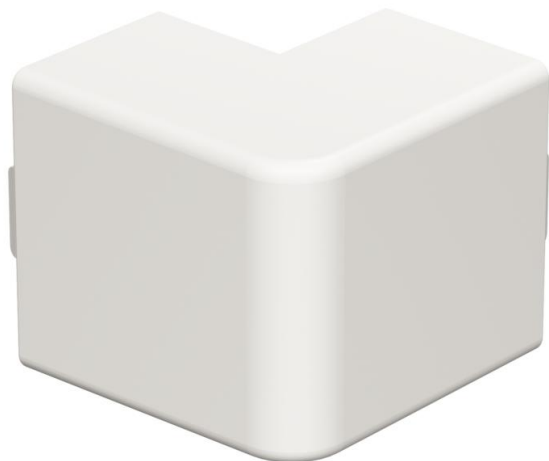

Polycarbonate/Acrylnitrile-butadiene-styrene

### Master data

|                     |  |
|---------------------|--|
| Item number         | 6175626                                      |
| Type                | WDKH-A30045RW                                |
| Description 1       | External corner hood                         |
| Description 2       | halogen-free                                 |
| Manufacturer        | OBO  |
| Dimension           | 30x45mm                                      |
| Colour              | Pure white; RAL 9010                         |
| Material            | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit | 4  |
| Unit of quantity    | Piece  |
| Weight              | 2 kg   |
| Weight unit         | kg/100 pc.                                   |

# Technical data sheet

External corner cover, trunking type WDKH 30045



Item number: 6175626

## Dimensions



|             |       |
|-------------|-------|
| Length      | 57 mm |
| Width       | 45 mm |
| Height      | 30 mm |
| Dimension a | 57 mm |
| Dimension b | 57 mm |

## Technical data

|                                   |              |
|-----------------------------------|--------------|
| Version for                       | Hood fitting |
| Fastening type                    | Lockable     |
| Maintain electrical functions     | no           |
| Halogen-free                      | yes          |
| Trunking depth                    | 30 mm        |
| Protection rating                 | IP30         |
| Protective film                   | no           |
| Protection rating IK code         | IK07.        |
| Self-extinguishing                | yes          |
| Permitted temperature range, max. | 90 °C        |
| Permitted temperature range, min. | -5 °C        |
| Angle range, max.                 | 90 mm        |
| Angle range, min.                 | 90 mm        |