

# Technical data sheet

## US 7 support FT

Item number: 6339263



Suspended support (U profile) of dimensions 70 x 50 mm with welded head plate.

For fastening to horizontal concrete ceilings and steel girders. For bracket widths of 400 mm or more, or if the bracket is mounted at the end of a suspended support, we recommend the use of the spacer, type DSK 61.



**St** Steel

**FT** Hot-dip galvanised

### Master data

Item number	6339263
Type	US 7 K 180 FT
Description 1	Support
Description 2	with welded head plate
Manufacturer	OBO
Dimension	70x50x1800
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Piece
Weight	843 kg
Weight unit	kg/100 pc.


# Technical data sheet

## US 7 support FT

Item number: 6339263




### Dimensions

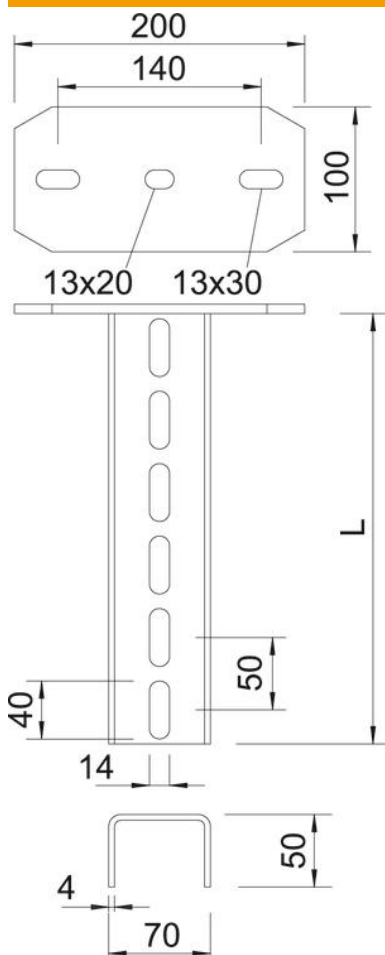

Length	1,800 mm
Width	70 mm
Height	50 mm
Dimension L	1,800 mm

### Loads



### Chara

Max. total  
= 10 cm  
of ETA(a)

### Technical data

Version for	U profile
Bracket length 200	7.5 kN
Bracket length 400	4.2 kN
Bracket length 600	2.9 kN
Maintain electrical functions	yes
Material thickness	4 mm
Maximum tensile load	11 kN