## **Technical data sheet**

## MS4121 mounting rail, slot 22 mm, FS, perforated







Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



Steel

Strip galvanized

#### Master data


Item number	1122956
Туре	MS4121P0600FS
Description 1	Profile rail
Description 2	perforated, slot 22mm
Manufacturer	OBO
Dimension	600x41x21
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	1
Unit of quantity	Piece
Weight	105 kg
Weight unit	kg/100 pc.

# **Technical data sheet**

## MS4121 mounting rail, slot 22 mm, FS, perforated



**Item number: 1122956** 

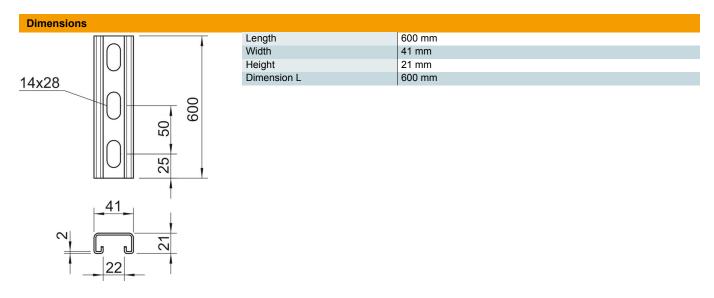

### **Technical data**

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	no
Material thickness	2 mm
With perforation	no
With toothing	yes
Profile shape	C profile
Slot width	22 mm
Static value A	1.65 cm <sup>2</sup>
Static value ly	0.95 cm
Static value Iz	4.51 cm
Static value Wy	0.89 cm <sup>2</sup>
Static value Wz	2.2 cm <sup>2</sup>